

SPECIFICATIONS FOR WATER TRUCKS

Williamsen-Godwin's water trucks are designed for optimal on and off road performance.

SPECIFICATIONS

Standard Sizes: 2000 (single axle) and 4000 (tandem axles)

TANK CONSTRUCTION

- 3/16 gauge ASTM-A-36 steel shell, end caps, and internal cross baffles
- Tank shape is modified ellipse with flat sides for space to put company graphics
- 96" wide, height and width determined by capacity in gallons required
- Clear tube sight gauge on rear
- 24" diameter manway and 2-1/2" hydrant fill pipe with air gap
- Heavy duty fenders
- 7 gauge formed-Z long members with boxed ends and channel cross supports
- Rear ladder for access to manway in tank
- All lights and reflectors are compliant with DOT requirements, wires encased in wire loom for protection
- Exterior of tank is sandblast and primed with epoxy grey primer then a single stage industrial PPG top coat is applied

TRUCK CONFIGURATIONS


- 3 Valve spray systems – 3 air operated UTEAV9030 valves controlled by a console in the cab. The first valve controls the two front spray heads, the second valve controls the two rear spray heads, and a third valve controls the center spray head
- 4x3 centrifugal cast iron pump 750 GPM @ 60 PSI with ceramic mechanical seal

TRUCK CONFIGURATIONS CONTINUED

- 5 Valve spray systems – 5 air operated UTEAV9030 valves controlled by a console in the cab. All five spray heads are controlled independently, two in the front, two at the rear, and one center spray head
- PTO pump or Auxiliary engine driven water pump applications
- Manual rewind 50' x 1-1/2" hose reel with adjustable fog nozzle
- Includes mud flap for rear tires and 97 db audible back up alarm
- Spring front mounts with rubber cushion strips between truck frame and water tank

ADDITIONAL OPTIONS

- Manual butterfly valves with 20' x 3" hose for ditch fill operations
- Hose basket or pipe installed above fender for storage
- Water cannons
- Tanks built of Stainless Steel for potable water applications
- Water tanks stands for dump body applications
- 3/4" garden hose valve
- Polibrid tank lining
- Bronze bushings for longer life
- Clear tube sight gauge on front
- Non-slip grip strut step ladder
- 10 gauge full length belly pan welded to bottom of the tank to prevent cracking in the most difficult of conditions
- Skid mount self-contained unit for dump bed applications
- Other options and configurations may be available upon request

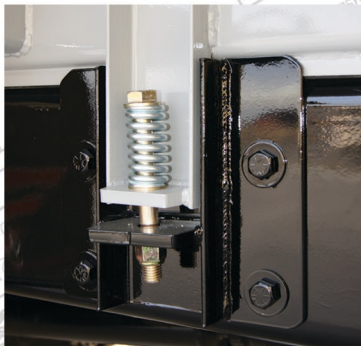

WILLIAMSEN • GODWIN
TRUCK BODY CO.

www.williamsen-godwin.com

1.800.828.9847

1925 West Indiana Avenue • Salt Lake City, Utah 84104
Phone (801) 973-9400 • Fax (801) 973-2838

DISTRIBUTED BY:

