



Godwin


Battle the Elements with Powder & Zinc

No other truck equipment manufacturer provides better environmentally friendly corrosion and abrasion protection than The Godwin Group.

	Standard Liquid Topcoat	Polyurethane system	Powder Topcoat only	Powder Topcoat with Powder Zinc Primer
Corrosion Protection			Past Standard	New standard
- Salt Spray	500 Hours	2000 Hours	1000 Hours	4000 Hours
- Humidity	100 to 200 Hours	1000 Hours	800 Hours	1000 Hours
Impact				
- Forward	50 lbs.	80 lbs.	80 lbs.	80 lbs.
- Reverse	30 lbs.	80 lbs.	80 lbs.	80 lbs.
Pencil Hardness	HB-H	H-2H	H-2H	H-2H
- Gravel-o-meter (Chips)	4B	5B	5B	5A No C size chips

The Godwin Group sets the standard by which all other truck equipment manufacturers are measured. Thermoset Powder coating with thermoset Zinc primer is STANDARD equipment for Godwin and Galion bodies, and Good Roads equipment. Zinc primer is available for an additional charge on Champion products.

Accelerated 4000 Hour Salt Spray Test with 5% Salt Solution. (Ocean water is 3%)

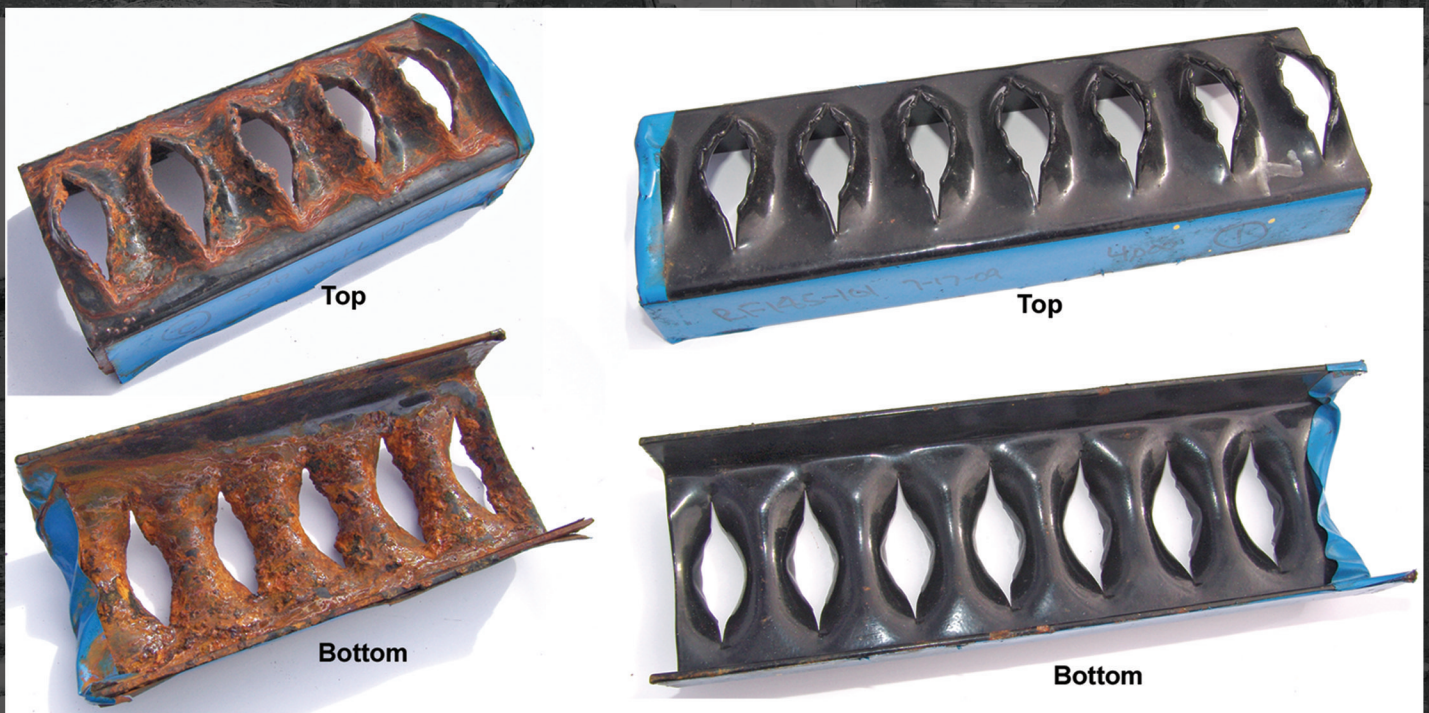

Powder Coated Only

Powder Coated with Zinc Primer